

INCREASING EFFICIENCY AND SAVING TIME – ON THE BACK-END.

Attached using a height-adjustable 2" x 2" trailer hitch mount, the **Arctic Plow Partner-S** offers an independent power unit that is mounted to the plow lift frame. This means no sharing off the plow pump for pressure. Operated with a two button pendant control in the cab, the **Arctic Plow Partner-S** puts the power to get into – and out of – those hard to reach spots, at your fingertips.

SELF-CONTAINED HYDRAULICS AND CONTROLS

Power up and power down allows for super clean plowing of all those hard-to-get spots, and the separate pump means no power is stolen from the front plow hydraulics



4 STRUCTURALLY INTEGRATED REINFORCING ARMS for enhanced structural strength

12 GAUGE HOT-ROLLED STEEL for timeless strength and durability


ADJUSTABLE HEIGHT, 2" X 2" TRAILER HITCH MOUNT

changes to meet the height of hitches on different vehicles, and allows for easy attachment and removal

HOT-DIPPED GALVANIZED STEEL FRAME

provides added resistance to abrasion, water and rust, making our plows virtually maintenance free

CUTTING EDGE AND WING SHOES are wear-resistant and replaceable

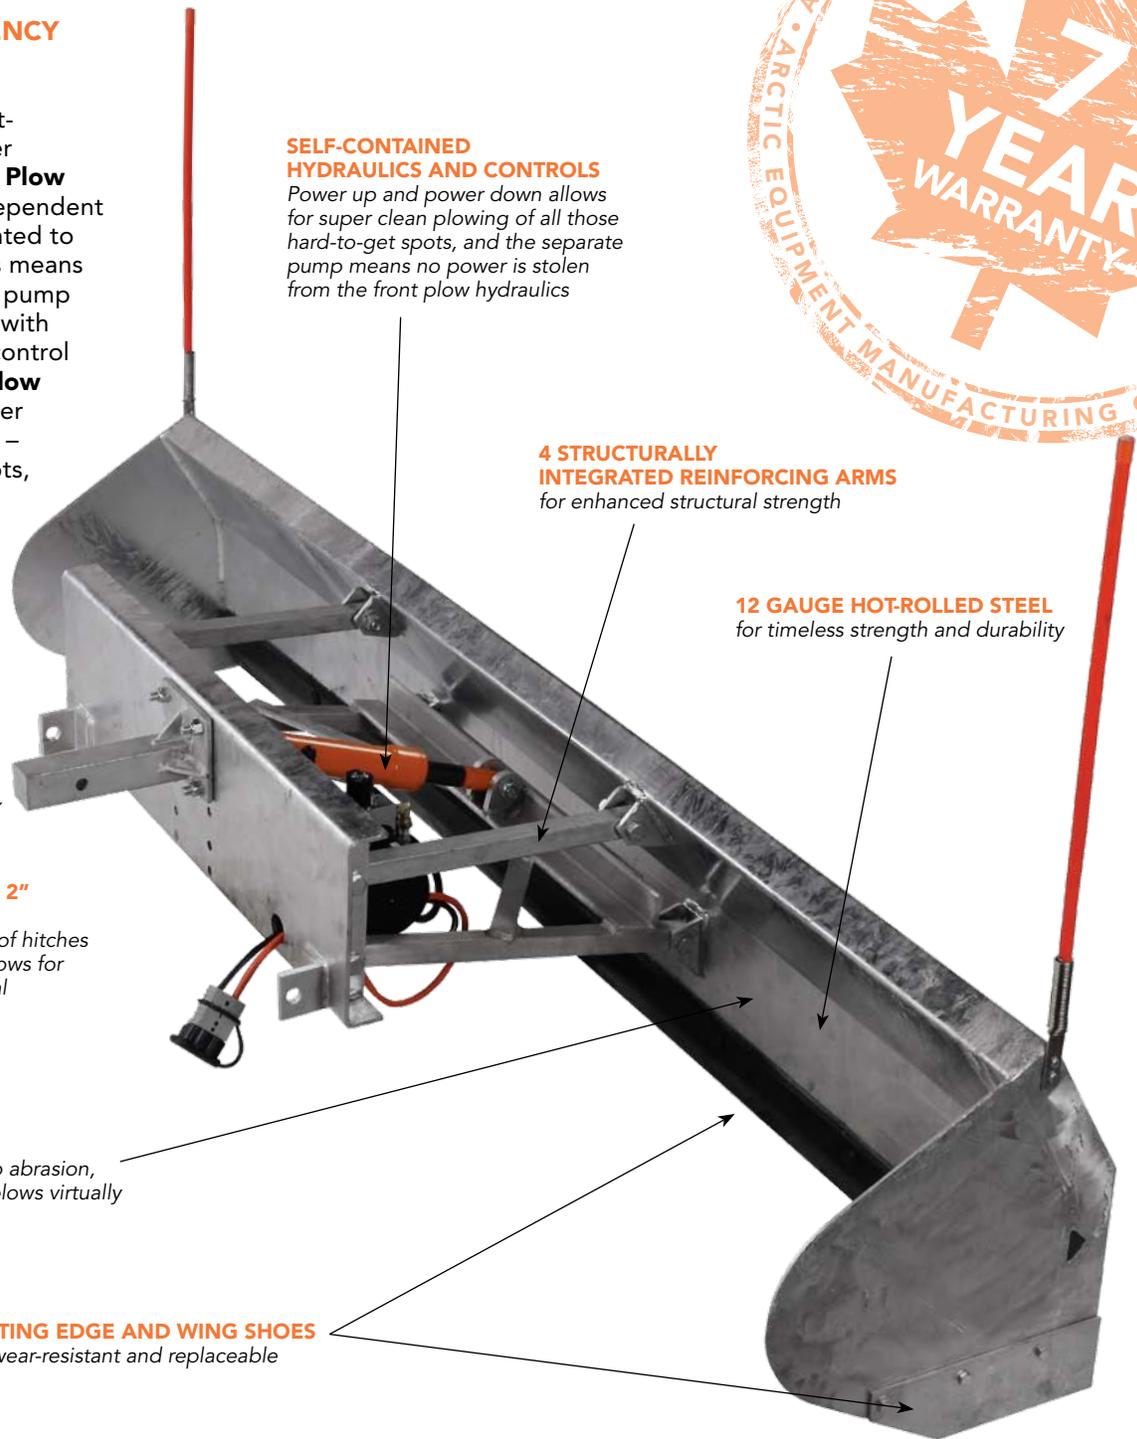

TOUGHER THAN A CANADIAN WINTER

MEET THE REST OF THE ARCTIC STEEL LINE



ARCTIC SD



ARCTIC HD

WHY CHOOSE STEEL?

Providing timeless performance and durability – Arctic’s steel plow partner is constructed from 12 gauge hot rolled steel, and is reinforced with integrated vertical ribs to form a single, tremendously strong structural unit. The box configuration with end wings captures the snow and holds it until you want to let it go. All of Arctic’s steel blades are dipped in galvanizing zinc coating for superior rust protection. **Legendary strength and time-proven results, contact your Arctic Dealer for full details.**




M3551 HYDRAULIC POWER UNIT

The M3551 electric hydraulic system features a two electrical valve configuration that provides down pressure for the blade and increases performance of the cutting edge. Standard operating pressures are 2,000 psi with crossover relief set at 2,500 psi. A two-button up-and-down control box is used to adjust the position of the blade.

ARCTIC PLOW PARTNER-S SPECIFICATIONS

Plow Name	PP84-S	PP90-S
Length	84"	90"
Moldboard Height	20"	20"
Material (Steel)	12 Gauge Rolled	12 Gauge Rolled
Plowing Width	84"	90"
Complete Weight	*340 lbs	*349 lbs
Mounting Type	Adjustable 2" x 2" Hitch	Adjustable 2" x 2" Hitch

* Does not include truck trailer hitch. (Class III or better)

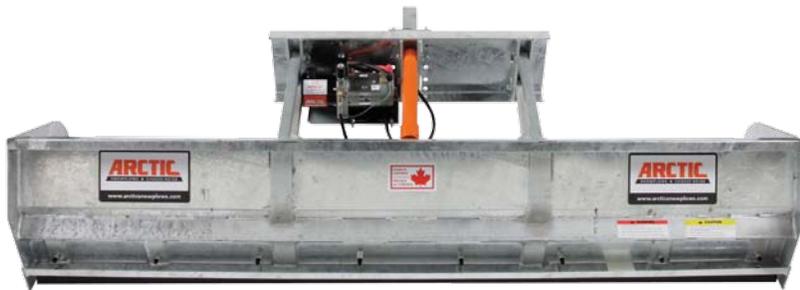

BUILT-IN ADJUSTABLE HEIGHT, 2" X 2" TRAILER HITCH MOUNT

The 2" X 2" trailer hitch mount allows for easy attachment and removal, and is height-adjustable to match up with hitches on different vehicles.

LEGAL DISCLAIMER: Vehicles intended to be equipped with Arctic equipment must comply with the vehicle manufacturers' specifications for equipment application. Please consult your vehicle dealer before purchase and installation. The purchaser assumes all vehicle risk associated with the attachment and operation of Arctic equipment.



THE ARCTIC SNOWPLOW 7 YEAR WARRANTY
 Arctic snow removal equipment is fully guaranteed to be free from material or manufacturing defects for three years from date of purchase and the plow's structural integrity is covered for an additional 4 years. Some conditions apply. Please ask your Arctic Dealer for details, or call 888 413 0019.

TOUGHER THAN A CANADIAN WINTER

Arctic Equipment Manufacturing Corporation
 Toll Free 888 413 0019
www.arcticsnowplovs.com